


COUVRANEUF®

EXPANSION JOINT COVERS

Interior & Exterior - Thermal - Seismic



- 4**  **SELECTION AND INSTRUCTION GUIDE**
pictogrammes, movements
- 6**  **MIFASOL THINLINE SURFACE**
for joint size 20 to 25 mm
RM, GFS, GFNS, GFPS
- 8**  **MIFASOL THINLINE FLUSH**
for 50 mm joint size
GFP, GFR, GFP-HD
- 10**  **MIFASOL ALL METAL SECTIONS**
for joint size 20 to 50 mm
RLG, HLG, AL-HD
- 12**  **MIFASOL THINLINE FLUSH**
for joint size 40 to 70 mm
HO, HLO, GFT-HD
- 14**  **MIFASOL THINLINE FLUSH**
for joint size 20 to 65 mm
GFT
- 16**  **MIFASOL THINLINE SEISMIC**
for joint size 50 to 250 mm
GFTD, SSR
- 18**  **MIFASOL THINLINE SEISMIC**
for joint size 150 to 400 mm
SGP, SGR
- 20**  **WALL AND CEILING COVERS RIGID SEALS**
for joint size 15 to 100 mm
W, JD
- 22**  **WALL AND CEILING COVERS**
for joint size 20 to 250 mm
AFW, SMN, FWF, FGFS, SFW
- 24**  **EXTERIOR SEISMIC COVERS FOR EXTERIOR FACADES**
for joint size 50 to 275 mm
sc

WHAT ARE THE VARIOUS PARAMETERS TO BE CONSIDERED WHEN DEALING WITH EXPANSION JOINTS :

Assure structural continuity ?

Operational safety ?

Air, water, gas and fire tightness ?

Allow for possible movement between buildings ?

Hinder vibration transfer between elements ?

Prevent stress transfer from one structure to another ?

In the event of an earthquake, free emergency service access ?

Provide an aesthetic or invisible finish ?

Assure maximum comfort of use ?

DEFINITION :

An expansion joint is space left free between two building elements to allow movement to take place.

Two types of movement are to be taken into consideration :

EXPANSION MOVEMENT :

This slow movement is the direct result of :

- the expansion coefficient of materials,
- environmental temperature difference (mini/maxi),
- structural length.

SEISMIC MOVEMENT :

This very rapid, one time, movement, caused by earth movement, is the direct result of :


- seismic movement
- the geographical location of the building
- the height of the building

Specific construction regulations regarding the prevention of seismic risks exist in every country depending on local conditions (EUCODE 8).

C/S FRANCE are members of the French Association for Seismic Risks and Prevention AFPS.



HISTORICAL MAP OF MAJOR SEISMIC INCIDENTS IN EUROPE / MIDDLE EAST

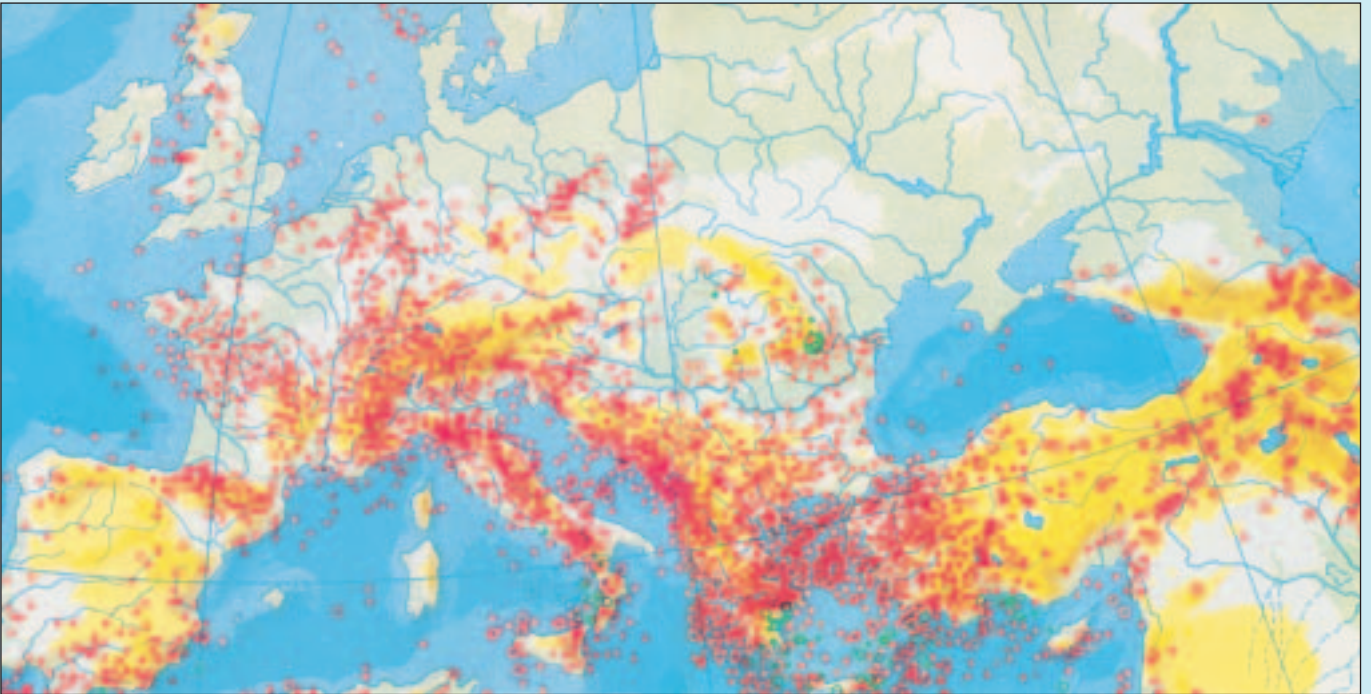

Expansion joints must assure the complete independence of demarcation block limits.

The joints must be thoroughly cleaned of all materials and permanently, protected against the introduction of foreign bodies likely to interfere with their performance.

The joint covers, plugging or sealing materials must not transmit significant stress from one element to another.

DESIGN MANUAL/CAD & TECHNICAL SERVICE


A complete Expansion Joint Design Manual is available free to qualified architects, design consultants and specification writers. The manual contains additional models not featured in this brochure. Also, details on specific models in the manual, and custom designs are available on or floppy disk in Autocad format.

The manual includes :

- Full or half-scale details of all C/S Standard Expansion Joint Cover assemblies.
- Guideline specification for each system.
- Step by step installation instructions.
- A section devoted to fire barrier protection.
- Details available on CAD.

C/S FRANCE

135, rue Edouard Isambard - B.P. 66
 27120 PACY SUR EURE CEDEX - FRANCE
 Phone : 00 33 (0)2 32 67 00 00 -
 Fax : 00 33 (0)2 32 67 14 12
 Website : www.cs-france.fr
 E-mail : marketing-export@cs-france.fr

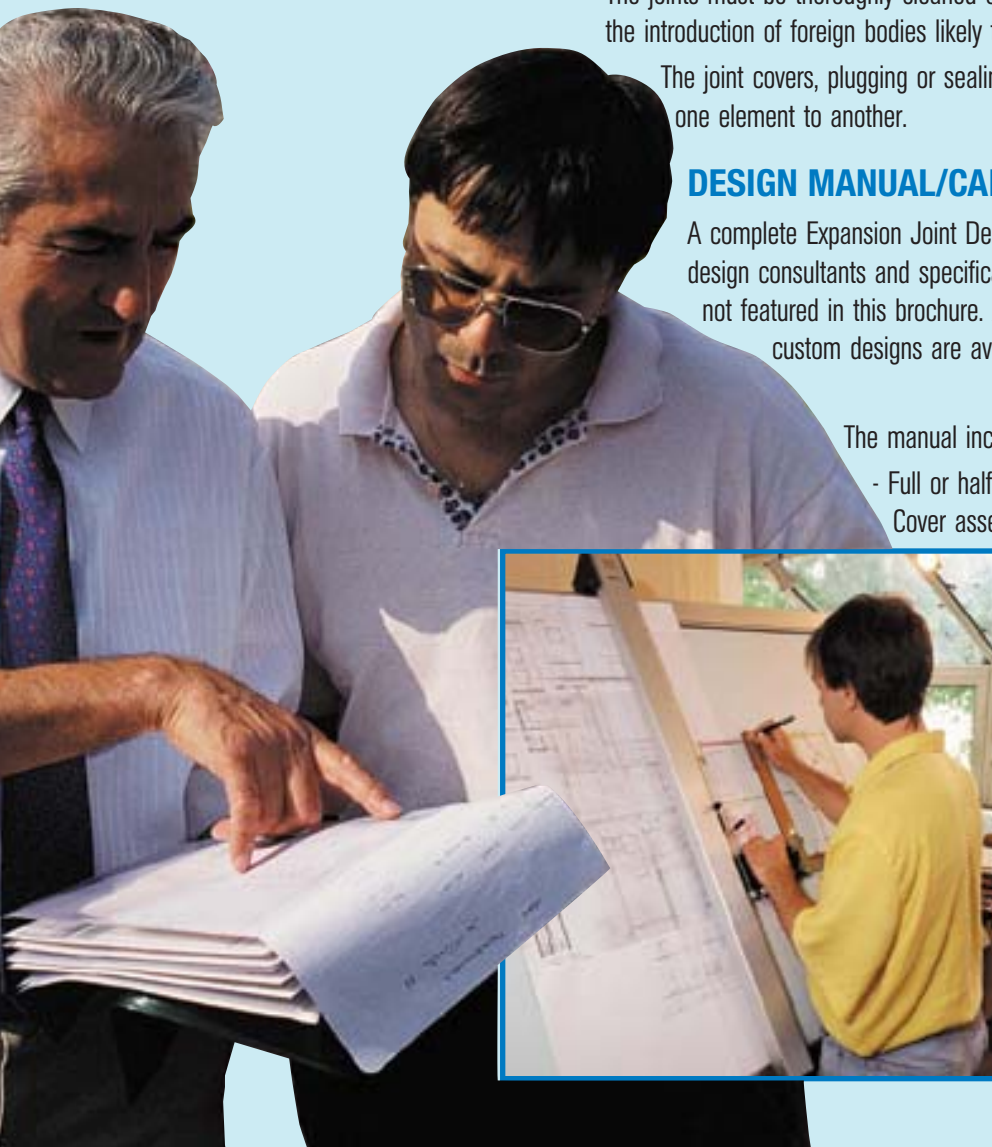

PICTOGRAMMES



CLASS 1

CROSSING ALLOWED :
pedestrians



CLASS 2

CROSSING ALLOWED :
- private cars
- small vans (occasionally)



CLASS 3

CROSSING ALLOWED :
- forklift trucks
(**pneumatic tyred wheels**)
- small vans
- heavy duty vehicles (occasionally)

EXPANSION JOINT COVER PERMISSIBLE MOVEMENT



Horizontal shear

Traction, horizontal
compression

Vertical unevenness

PROTECTION OF EXPANSION JOINTS AGAINST THE PROLIFERATION OF FIRE AND GAS :






As a complement to its range of joint covers, C/S FRANCE has various fire break systems available which meet all joint configurations to be dealt with.

Please refer to documentation "Joint coupe feu 07" (Fire stops).

SELECTION AND

IMPLANTATION	REFERENCE	TYPE OF JOINT	JOINT WIDTH mm	MOVEMENT DIRECTION
floor	RM20...	surface	20	→
floor	GFS...	surface	25 to 65	→
floor	GFNS...	surface	20 to 65	→
floor	GFPS...	surface	20 to 65	→
floor	GFP...	flush	50	↘
floor	GFR...	flush	50	↘
floor	GFP...HD	flush	50	↘
floor	RLG36/31	surface	40	↘
floor	HLG55/...	flush	40	↘
floor	AL...HD	flush	50	↘
floor	HO35/...	flush	40 to 50	↕
floor	HO50/40	flush	40 to 50	↕
floor	HLO55/...	flush	40 to 50	→
floor	GFT.../40HD	flush	40 to 70	↕
floor	GFT...	flush	20 to 65	→
floor	SSR...	flush	100 to 250	↘
floor	GFTD...	flush	50 to 75	↘
floor	SGP...	flush	150 to 400	↘
floor	SGR...	flush	150 to 400	↘
wall / ceiling	JD - W	surface	15 to 80	→
wall / ceiling	AFW...	flush	25 to 50	↕
wall / ceiling	SMN...	surface	25 to 50	↕
wall / ceiling	SFW...	surface	100 to 250	↕
wall / ceiling	FWF...	flush	20 to 50	↘
wall / ceiling	FGFS...	surface	25 to 50	↘
wall / ceiling	SC...	surface	50 to 275	↘

INSTRUCTION GUIDE

ALLOWABLE SEISMIC MOVEMENT	VISIBLE SURFACE	CROSSING ALLOWED			USE	PAGE	WALL CONTINUITY EXAMPLE
		 CLASS 1	 CLASS 2	 CLASS 3			
	elastomer	●			interior	6	FGFS...
	elastomer		●		interior	6	FGFS...
	elastomer	●			interior	6	FWF...
●	elastomer	●			interior	6	FWF...
●	metal and elastomer	●			interior	8	FWF...
●	elastomer and ditto environment	●			interior	8	AFW...
●	metal and elastomer		●		interior	8	AFW...
	metal			●	exterior	10	SC50
	metal			●	exterior	10	SC50
●	metal		●		exterior	10	SC50
	elastomer		●		interior	12	SMN...
	elastomer			●	interior	12	SMN...
	elastomer		●	●	interior	12	SMN...
	elastomer			●	exterior	12	SC50
	elastomer			●	interior	14	FWF...
	ditto environment			●	exterior	16	SCW...
	ditto environment	●			interior	16	SCW...
●	metal	●			interior	18	SCW...
	ditto environment	●			interior	18	SCW...
	metal, rigid seal	NA	NA	NA	interior/exterior	20	
●	metal	NA	NA	NA	interior	22	
●	metal	NA	NA	NA	interior	22	
●	metal	NA	NA	NA	interior	22	
	elastomer	NA	NA	NA	interior	22	
	elastomer	NA	NA	NA	interior	22	
●	elastomer	NA	NA	NA	exterior	24	

MIFASOL THINLINE SURFACE

Flush or thinline surface finish.

Multidirectional elasticity.

Elastomer flexible strips resistant to oils, tars, and certain acids.

2 standard colours of gaskets (grey and black).

Easy to maintain smooth or ribbed exposed surfaces.




Fire resistant barrier, frame options to suit most floor finishes, optional.



FOR JOINTS
from 20 to 25 mm

Type	a	b	c	d	Movement ± mm	Example of wall continuity
	mm	mm	mm	mm		
RM 20-0	20	20	96	0	3	RM
RM 20-3	20	20	96	3	3	RM
RM 20-5	20	20	96	5	3	RM
RM 20-8	20	24	96	8	3	RM
RM 20-10	20	24	96	10	3	RM
GFS-25	25		110	0	5	FGFS-25
GFSW-25*	25		68	0	5	FGFSN-25
GFNS-25	25	27	110	3	5	FWF-25
GFNSW-25*	25	28	68	3	5	FWFC-25
GFPS-25	25	30	110	5	5	FWF-25
GFPSW-25*	25	28	68	5	5	FWFC-25

*References for floor joints which run along the wall. (Floor to wall).

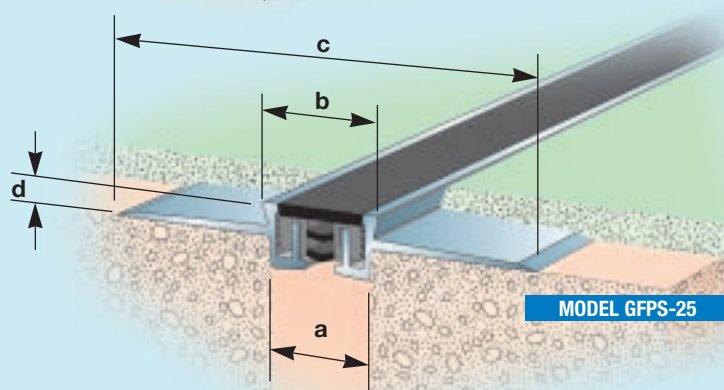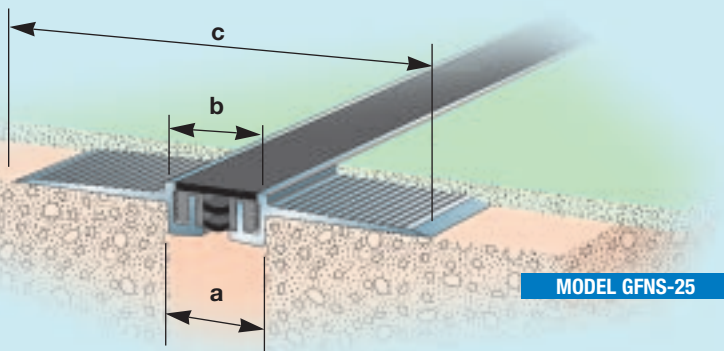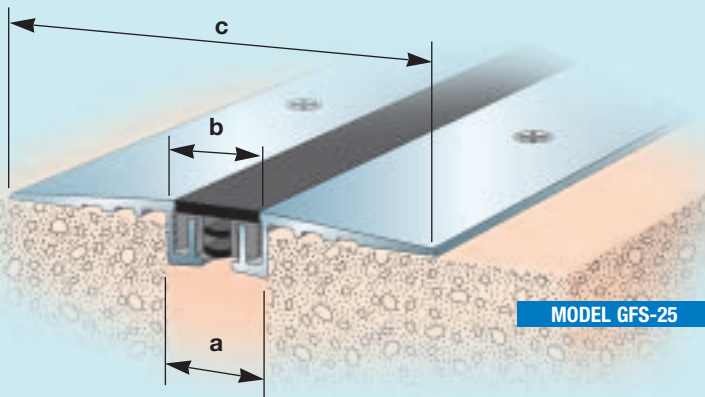

Note : GFS, GFNS, and GFPS references are available in widths of 50 and 65 mm.


DESCRIPTION


Aluminium alloy sections.

Elastomer flexible bands which snap onto the aluminium lateral supports.

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Grey and black standard colours. For other colours please contact us.

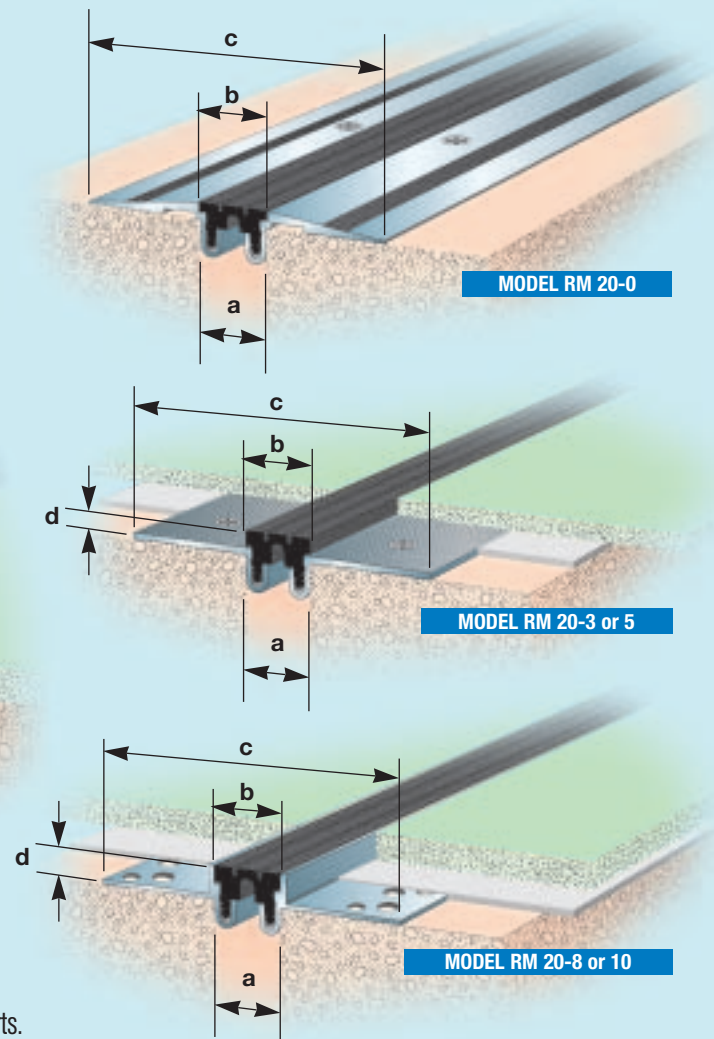

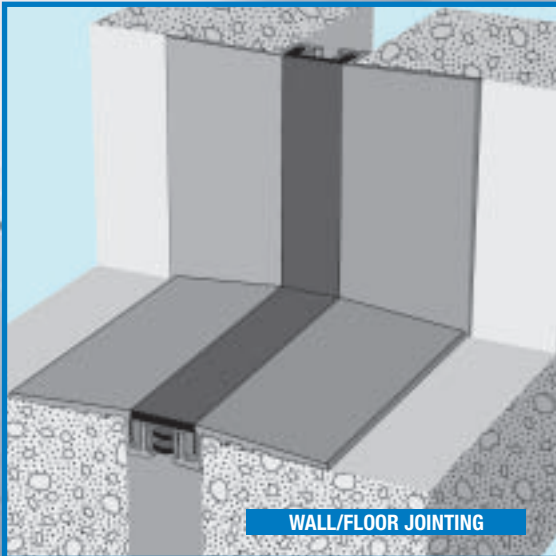

TYPICAL SPECIFICATION EXAMPLE

The supply and installation of 60 meters of C/S FRANCE GFS-25 joint cover.

Specification complement :

The supply and installation of a "jointofeu" system adapted to the dimensions of the joint to be dealt with.
 Elements manufactured and supplied by
 C/S FRANCE
 135, rue Edouard Isambard - B.P. 66
 27120 PACY SUR EURE CEDEX - FRANCE
 Phone : 00 33 (0)2 32 67 00 00 - Fax : 00 33 (0)2 32 67 14 12
 Website : www.cs-france.fr
 E-mail : marketing-export@cs-france.fr

MIFASOL THINLINE FLUSH

Flush finish.

Multidirectional elasticity.

Elastomer flexible strips resistant to oils, tars, and certain acids.




2 standard colours of gaskets (grey and black).

Easy to maintain smooth or ribbed exposed surfaces

Fire resistant barrier, optional.

Possible integration of the current covering in the central part.

No emission of chloride smoke in the event of fire.

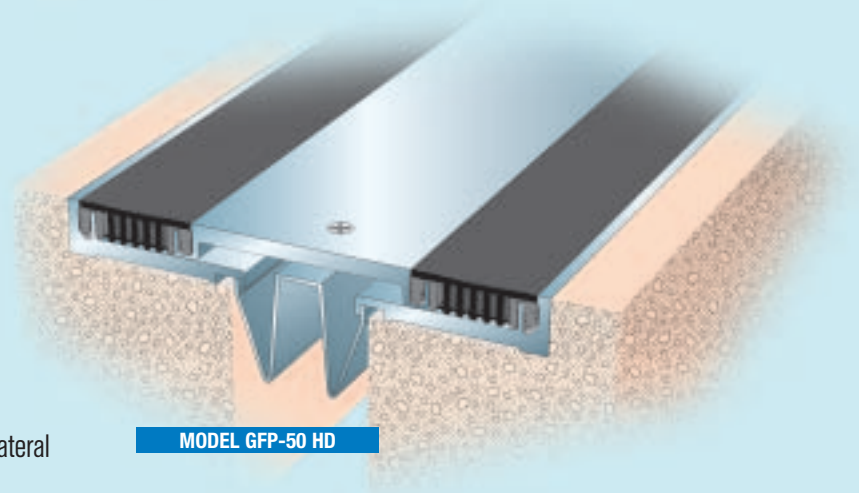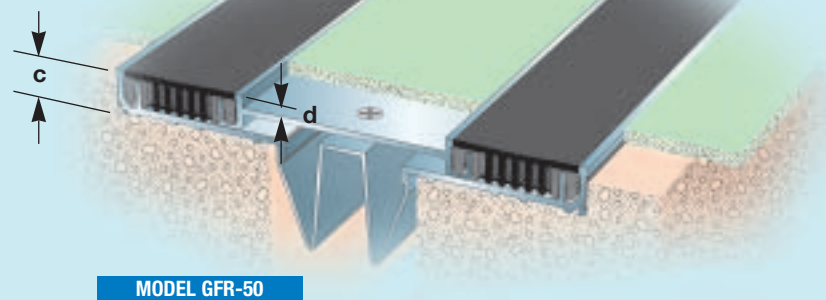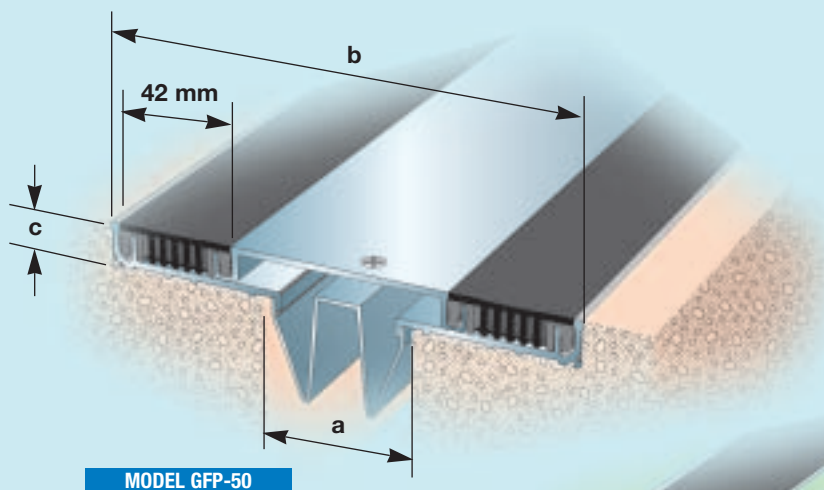

**FOR JOINTS
of 50 mm**

Type	a mm	b mm	c mm	d mm	Movt ± mm	Example of wall continuity
GFP-50	50	166	16	0	20	FWA-50
GFPW-50*	50	108	16	0	10	FWAC-50
GFR-50	50	166	16	3	20	FWA-50
GFRW-50*	50	108	16	3	10	FWAC-50

*References for floor joints which run along the wall. (Floor to wall).



**FOR JOINTS
from 50 to 60 mm**

Type	a mm	b mm	c mm	Movement ± mm	Example of wall continuity
GFP-50 HD	50	166	19	20	FWA-50
GFPW-50 HD*	50	109	19	10	FWAC-50

*References for floor joints which run along the wall. (Floor to wall).


DESCRIPTION

Aluminium alloy sections.

Elastomer flexible gaskets which snap onto aluminium lateral supports.

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Grey and black standard colours. For other colours, please contact us.

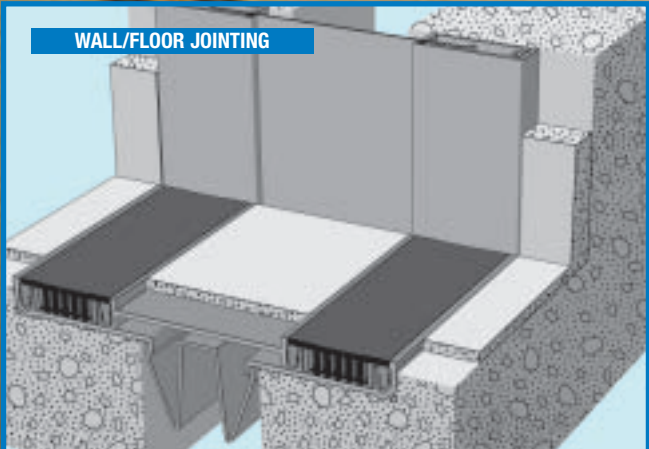

MIFASOL ALL METAL SECTIONS

Flush or surface finish.

All aluminium assembly

Mechanically assembled elements

Multidirectional sliding system.

Fire resistant barrier, optional.

USE

AL-HD for resin or asphalt floor covering. (Flush)

RLG for concrete floor covering. (Surface)

HLG for resin or asphalt floor covering. (Flush)

DESCRIPTION

Aluminium alloy sections.

The exposed sections are natural shade anodised.



FOR JOINTS
from 20 to 50 mm





Type	a	b	c	d	Movement ± mm
	mm	mm	mm	mm	
AL 50 HD	50	-	230	25	50
ALW 50 HD*	50	-	140	25	25
AL 50 HDC	50	-	230	25	50


*References for floor joints which run along the wall. (Floor to wall).



FOR JOINTS
from 20 to 50 mm

Type	a	b	c	d	Movement ± mm
	mm	mm	mm	mm	
RLG 36/31	40	-	190	31	6
HLG 55/31	40	55	190	31	6
HLG 55/50	40	55	190	50	6

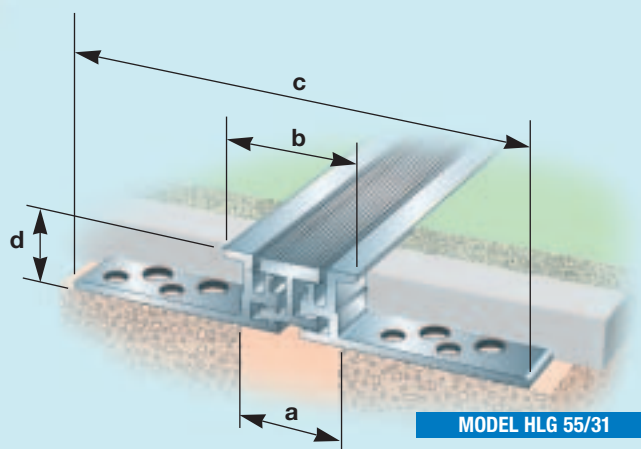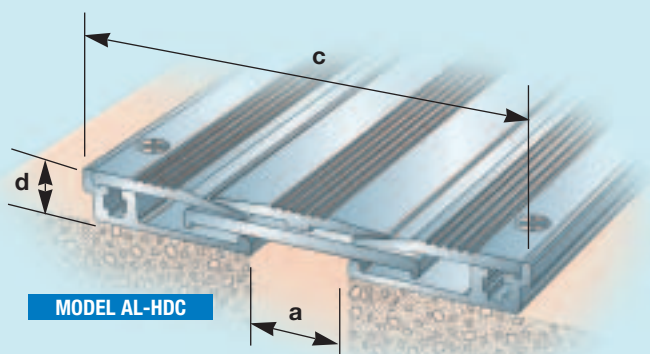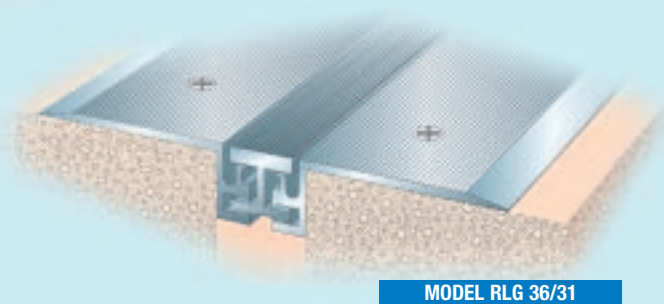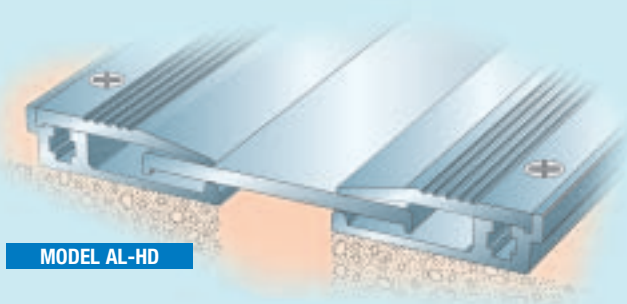

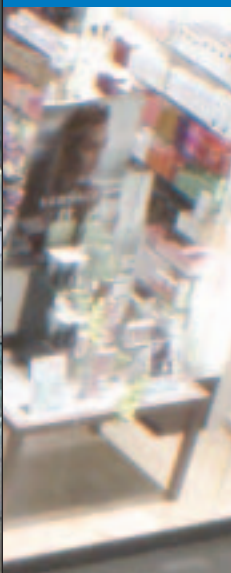


MIFASOL THINLINE FLUSH

Flush finish. Multidirectional elasticity.


Very thick flexible strips resistant to oil, tar, and certain acids.

2 standard colours of gaskets (grey and black). Fire resistant barrier, optional.


MODEL HO 35/28

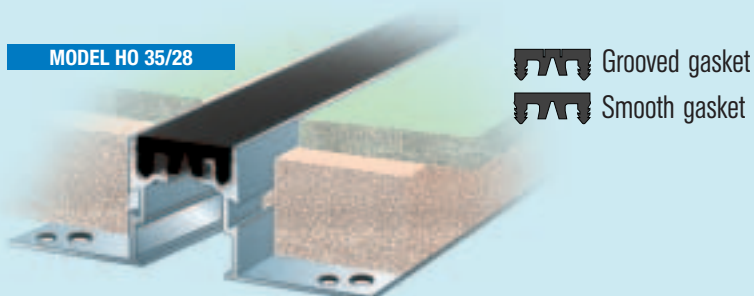


MODEL HO 50/40

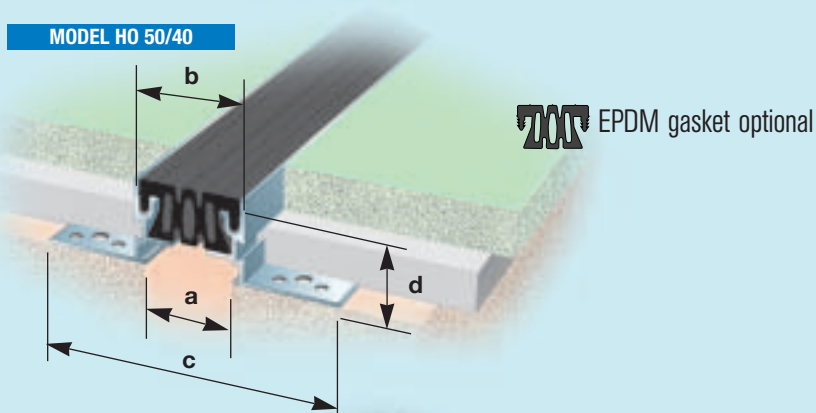

MODEL GFT 40/40 HD

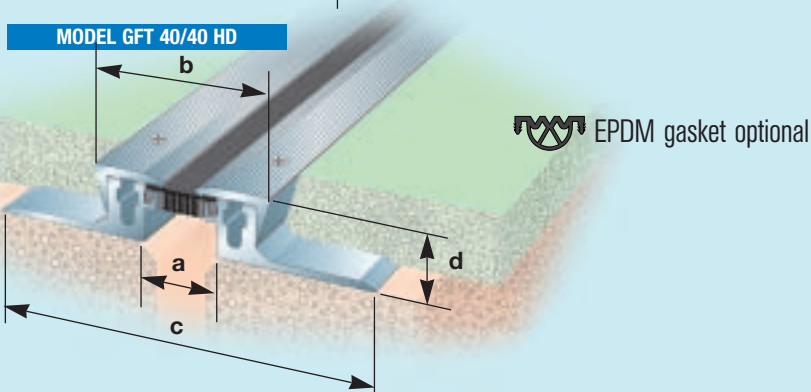

MODEL HLO 55/31

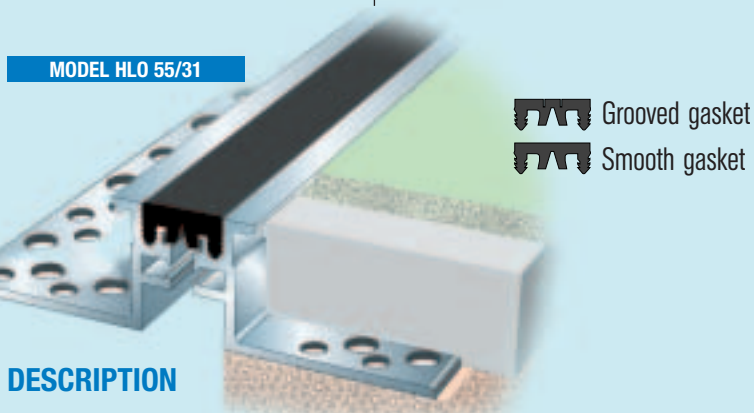

DESCRIPTION

Aluminium alloy sections.

Elastomer flexible gaskets which snap onto aluminium lateral supports.

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Grey and black standard colours. For other colours, please contact us.



FOR JOINTS
from 20 to 40 mm

Type	a mm	b mm	c mm	d mm	Movement ± mm
HO 35/14	33	38	128	14	5
HO 35/28	33	38	128	28	5
HO 35/42	33	38	128	42	5
HO 35/60	33	44	128	60	5
HO 35/80	33	44	128	80	5
HO 35/100	33	44	128	100	5
HO 35/14P*	33	38	128	14	5
HO 35/28P*	33	38	128	28	5
HO 35/42P*	33	38	128	42	5
HO 35/60P*	33	44	128	60	5
HO 35/80P*	33	44	128	80	5
HO 35/100P*	33	44	128	100	5

*References for floor joints which run along the wall. (Floor to wall).



FOR JOINTS
from 40 to 70 mm

Type	a mm	b mm	c mm	d mm	Movement ± mm
HO 50/30	40/50	55	145	30	10
HO 50/40	40/50	55	145	40	10
HO 50/60	40/50	55	145	60	10
HO 50/80	40/50	55	145	80	10
HO 50/40 P*	40/50	55	100	40	10



*References for floor joints which run along the wall. (Floor to wall).
HO 50 range can be proposed with an EPDM gasket.



FOR JOINTS
from 40
to 70 mm

Type	a mm	b mm	c mm	d mm	Movement ± mm
HLO 55/31	40/50	58	194	31	5
HLO 55/31 P*	40/50	48	118	31	5
HLO 55/50	40/50	58	194	50	5
HLO 55/50 P*	40/50	48	118	50	5
GFT 40/25 HD	40/70	107	233	25	10
GFT 40/40 HD	40/70	107	233	40	10

*References for floor joints which run along the wall. (Floor to wall).
GFT 40 HD range can be proposed with an EPDM gasket.

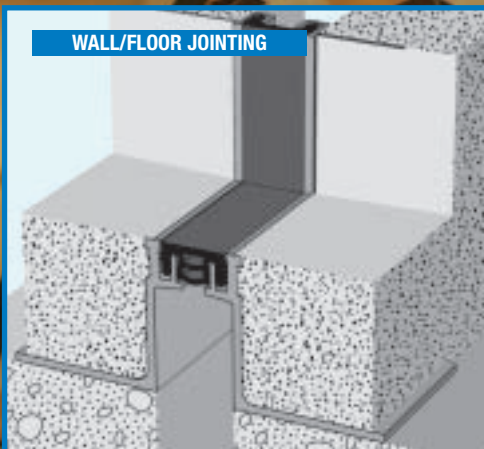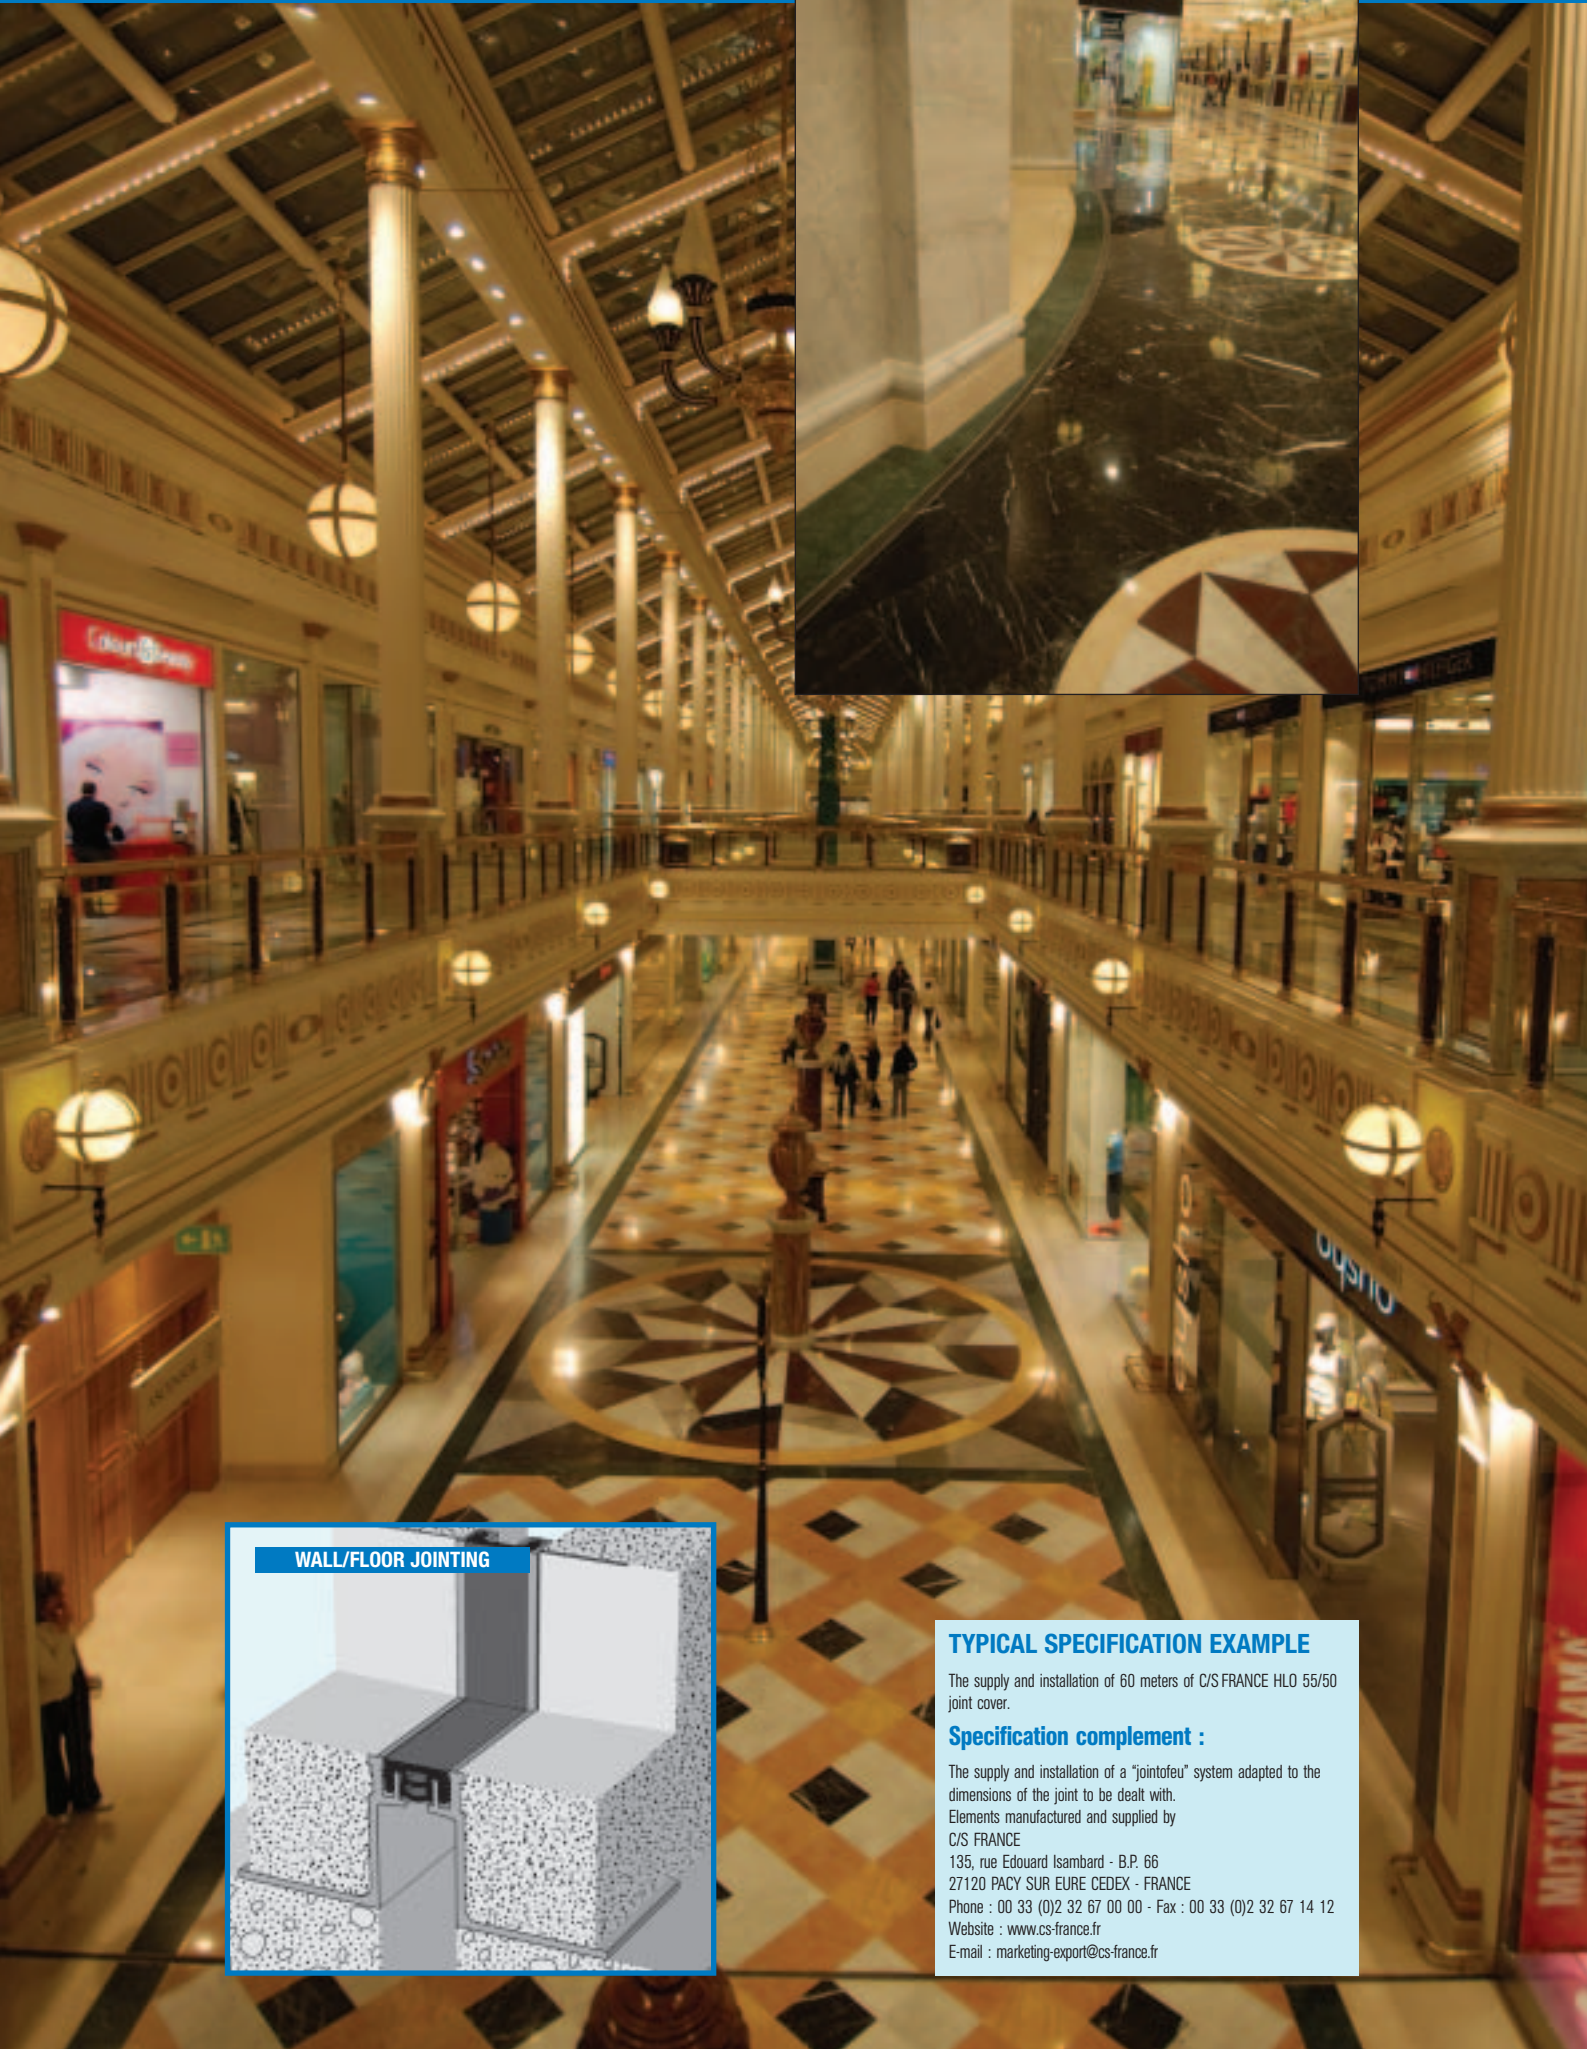

TYPICAL SPECIFICATION EXAMPLE

The supply and installation of 60 meters of C/S FRANCE HLO 55/50 joint cover.

Specification complement :

The supply and installation of a "jointofeu" system adapted to the dimensions of the joint to be dealt with. Elements manufactured and supplied by C/S FRANCE

135, rue Edouard Isambard - B.P. 66

27120 PACY SUR EURE CEDEX - FRANCE

Phone : 00 33 (0)2 32 67 00 00 - Fax : 00 33 (0)2 32 67 14 12

Website : www.cs-france.fr

E-mail : marketing-export@cs-france.fr

MIFASOL THINLINE FLUSH

Flush finish.

Multidirectional elasticity.

Elastomer flexible strips resistant to oil, tar, and certain acids.

2 standard colours of gum (grey and black).

Easy to maintain smooth or ribbed exposed surfaces.

Fire resistant barrier, optional.


No emission of chloride smoke in the event of fire.



FOR JOINTS
from 20 to 25 mm

Type	a mm	b mm	c mm	d mm	Mouv ± mm	Example of wall continuity
GFT-25-25	20/25	32	127	25	5	FWF-25
GFTW-25-25*	20/25	22	76	25	5	FWFC-25
GFT-25-38	20/25	32	127	38	5	FWF-25
GFTW-25-38*	20/25	22	76	38	5	FWFC-25
GFT-25-50	20/25	32	127	50	5	FWF-25
GFTW-25-50*	20/25	22	76	50	5	FWFC-25
GFT-25-75	20/25	32	127	75	5	FWF-25
GFTW-25-75*	20/25	22	76	75	5	FWFC-25

*References for floor joints which run along the wall. (Floor to wall).

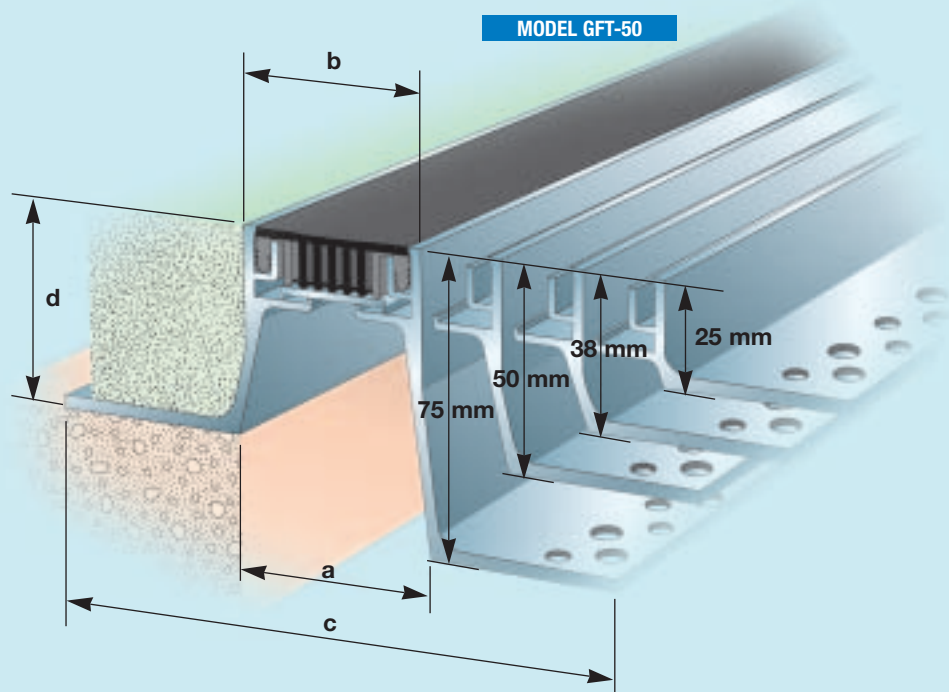

FOR JOINTS
from 40 to 65 mm

Type	a mm	b mm	c mm	d mm	Mouv ± mm	Example of wall continuity
GFT-50-25	40/50	48	150	25	10	FWFP-50
GFTW-50-25*	40/50	48	100	25	10	FWFPC-50
GFT-50-38	40/50	48	150	38	10	FWFP-50
GFTW-50-38*	40/50	48	100	38	10	FWFPC-50
GFT-50-50	40/50	48	150	50	10	FWFP-50
GFTW-50-50*	40/50	48	100	50	10	FWFPC-50
GFT-50-75	40/50	48	150	75	10	FWFP-50
GFTW-50-75*	40/50	48	100	75	10	FWFPC-50
GFT-65-25	65	63	165	25	10	FWFP-65
GFTW-65-25*	65	63	115	25	10	FWFPC-65
GFT-65-38	65	63	165	38	10	FWFP-65
GFTW-65-38*	65	63	115	38	10	FWFPC-65
GFT-65-50	65	63	165	50	10	FWFP-65
GFTW-65-50*	65	63	115	50	10	FWFPC-65
GFT-65-75	65	63	165	75	10	FWFP-65
GFTW-65-75*	65	63	115	75	10	FWFPC-65

*References for floor joints which run along the wall. (Floor to wall).

DESCRIPTION

Aluminium alloy sections.

Elastomer flexible gaskets which snap onto aluminium lateral supports.

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Grey and black standard colours. For other colours, please contact us.



TYPICAL SPECIFICATION EXAMPLE

The supply and installation of 60 meters of C/S FRANCE GFT-50-50 joint cover.

Specification complement :

The supply and installation of a "jointofeu" system adapted to the dimensions of the joint to be dealt with.

Elements manufactured and supplied by
C/S FRANCE

135, rue Edouard Isambard - B.P. 66

27120 PACY SUR EURE CEDEX - FRANCE

Phone : 00 33 (0)2 32 67 00 00 - Fax : 00 33 (0)2 32 67 14 12

Website : www.cs-france.fr

E-mail : marketing-export@cs-france.fr

MIFASOL THINLINE SEISMIC

Flush finish.

Multidirectional elasticity.

Elastomer flexible strips resistant to oil, tar, and certain acids.

2 standard colours of gaskets (grey and black).

Easy to maintain smooth exposed surfaces.

Fire resistant barrier, optional.



No emission of chloride smoke in the event of fire.



FOR JOINTS
from 40
to 250 mm

Type	a mm	b mm	c mm	d mm	Movement ± mm	Example of wall continuity
GFTD-50	50	273	375	42	20	SMN-100
GFTD-75	75	303	405	57	30	SMN-100
GFTD-100	100	327	428	64	30	SMN-100
GFTD-150	150	377	478	64	30	SMN-100
SSR-100	100		365		50	SFW-100
SSRW-100* 100			235		25	SCW-100
SSR-150	150		415		76	SFW-150
SSRW-150* 150			285		38	SCW-150
SSR-200	200		520		102	SFW-200
SSRW-200* 200			360		50	SWC-200
SSR-250	250		570		127	SFW-250
SSRW-250* 250			411		63	SCW-250

*References for floor joints which run along the wall. (Floor to wall).

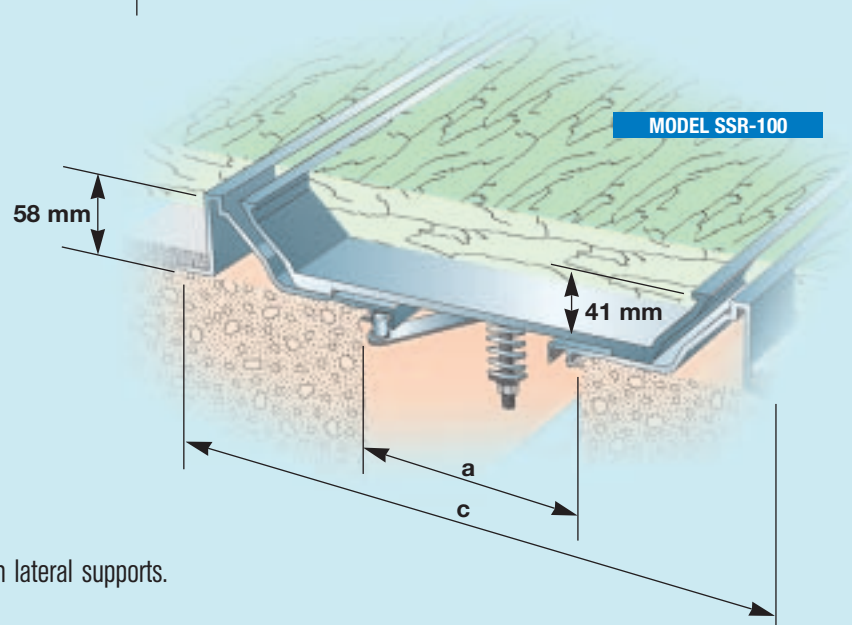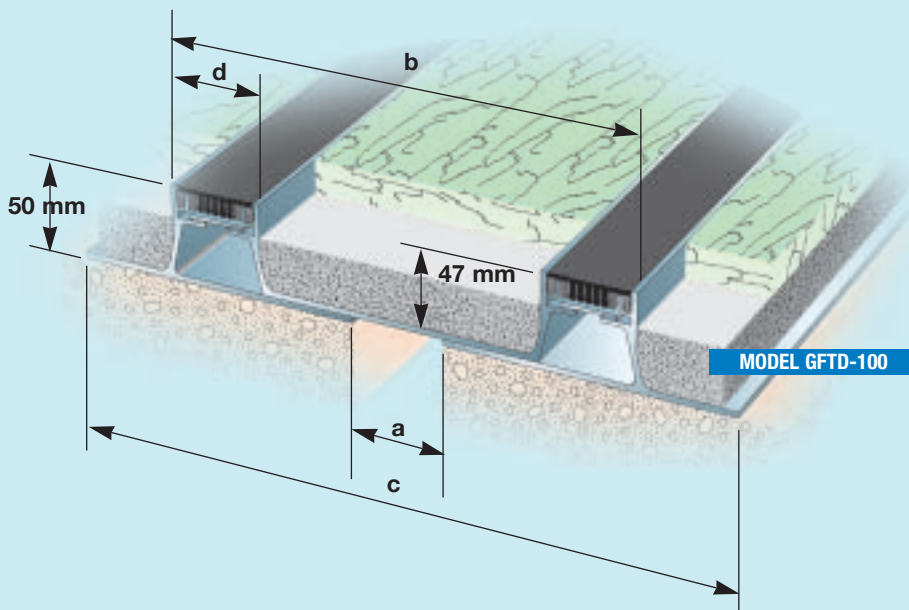


DESCRIPTION

Aluminium alloy sections.

Elastomer flexible gaskets which snap onto aluminium lateral supports.

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Grey and black standard colours. For other colours, please contact us.

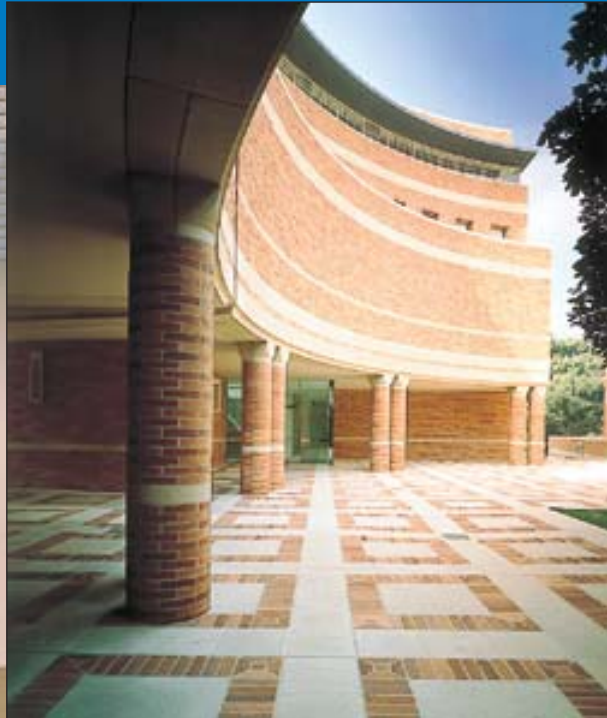

TYPICAL SPECIFICATION EXAMPLE

The supply and installation of 90 meters of C/S FRANCE SSR-200 joint cover.

Specification complement :

The supply and installation of a "jointfeu" system adapted to the dimensions of the joint to be dealt with.
Elements manufactured and supplied by
C/S FRANCE

135, rue Edouard Isambard - B.P. 66

27120 PACY SUR EURE CEDEX - FRANCE

Phone : 00 33 (0)2 32 67 00 00 - Fax : 00 33 (0)2 32 67 14 12

Website : www.cs-france.fr

E-mail : marketing-export@cs-france.fr

MIFASOL THINLINE SEISMIC

Flush finish.

Multidirectional elasticity.

Elastomer flexible strips resistant to oil, tar, and certain acids.

2 standard colours of gaskets (grey and black).

Easy to maintain smooth exposed surface.

Fire resistant barrier, optional.

Possible integration of the current covering in the central section.

During movements of considerable magnitude mechanical constraints are systematically distributed along the two expansion strips due to pivots screwed under the central plate which hold it in the central position.


This system is intended for pedestrian areas.




FOR JOINTS
from 150 to 400 mm

Type	a mm	b mm	Movement ± mm
SGP/SGR-150	150	330	30
SGPW/SGRW-150*	150	240	15
SGP/SGR-200	200	405	30
SGPW/SGRW-200*	200	305	15
SGP/SGR-250	250	480	30
SGPW/SGRW-250*	250	370	15
SGP/SGR-300	300	560	30
SGPW/SGRW-300*	300	430	15
SGP/SGR-350	350	635	30
SGPW/SGRW-350*	350	495	15
SGP/SGR-400	400	710	30
SGPW/SGRW-400*	400	560	15

*References for floor joints which run along the wall. (Floor to wall).

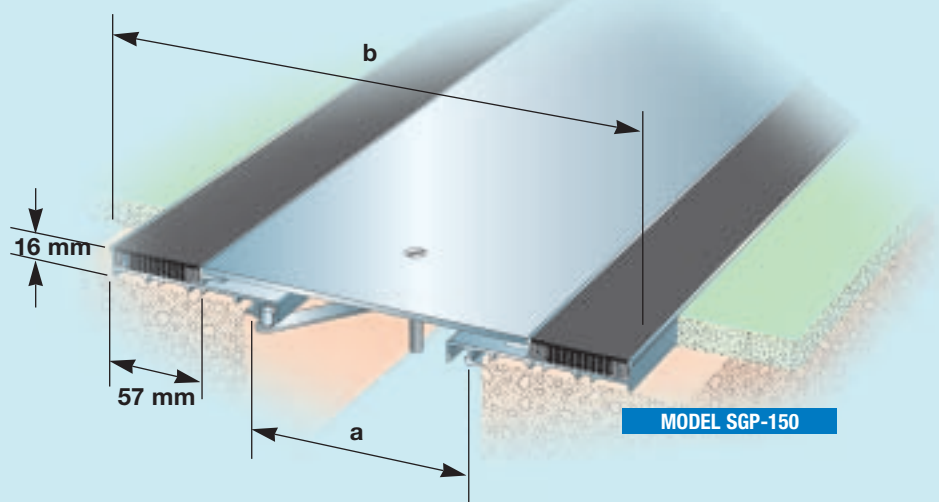

MODEL SGP-150

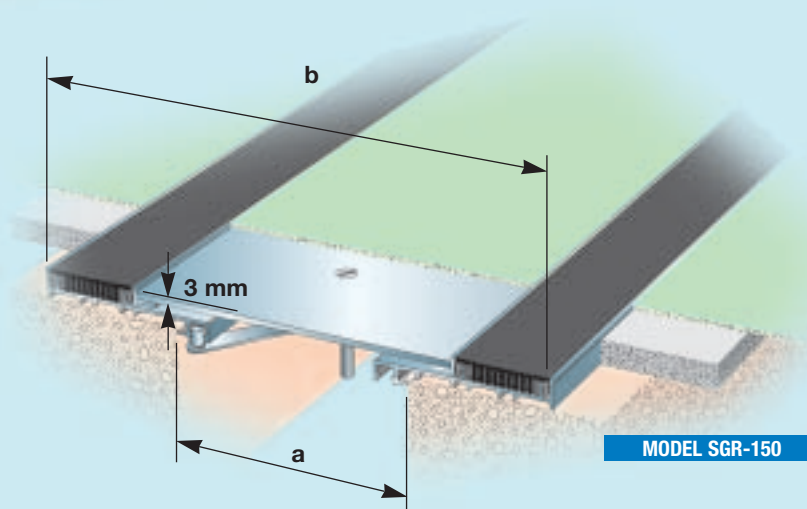

MODEL SGR-150

DESCRIPTION


Aluminium alloy sections.

Elastomer flexible gaskets which snap onto aluminium lateral supports.

Stainless steel self-centring pivots.

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Grey and black standard colours. For other colours, please contact us.

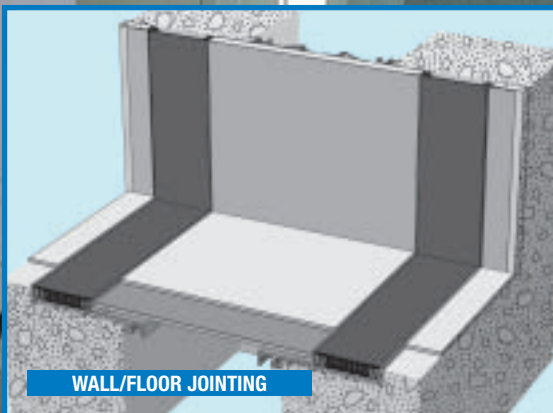

WALL/FLOOR JOINTING

TYPICAL SPECIFICATION EXAMPLE

The supply and installation of 90 meters of C/S FRANCE SGP-200 joint cover.

Specification complement :

The supply and installation of a "jointofeu" system adapted to the dimensions of the joint to be dealt with. Elements manufactured and supplied by C/S FRANCE

135, rue Edouard Isambard - B.P. 66

27120 PACY SUR EURE CEDEX - FRANCE


Phone : 00 33 (0)2 32 67 00 00 - Fax : 00 33 (0)2 32 67 14 12

Website : www.cs-france.fr

E-mail : marketing-export@cs-france.fr


WALL AND CEILING COVERS - W RIGID

**FOR FACADE,
WALL AND CEILING
from 15 to 100 mm**

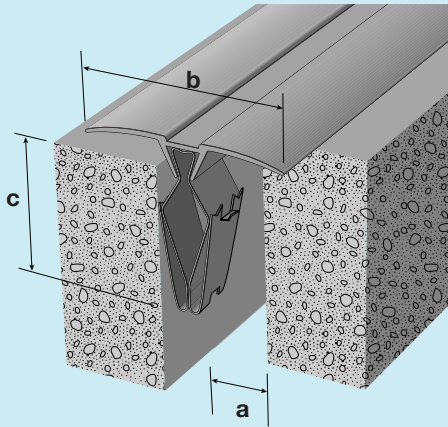


**CLIPS
(dependent upon joint width)**

CLIP 15-35



for joint from 15 to 35 mm wide (a) minimum depth: 40 mm (c).

CLIP 35-80



for joint from 35 to 80 mm wide (a) minimum depth: 60 mm (c).

OPERATING CHARACTERISTICS


FAÇADE FLAT JOINT COVER, ANGLED FACADES AND FLAT FLOORS

Width of the construction joint mm (a)	Section		Overlap width mm (b)	Fastening		Floor continuity see catalogue 02-B
	Ref.	Material		Nbr of clips per 3 lm length	Ref.	
0 to 15	W 30-P	Dural	30	4	15-35	Glue*
15 to 35	W 50-P	PVC Dural	50	5	15-35	-
	W 60-P	Dural laqué Dural	60	4		
15 to 30	W 50-A	PVC	43	5	15-35	-
		Dural	49	4		
35 to 50	W 70-P W 80-P	PVC	70	5	35-80	W 70-P PVC Dural
		Dural	80	4		
30 to 45	W 70-A	PVC	60	5	35-80	W 70-A Dural
		Dural	60	4		
35 to 70	W 90-P W 100-P	Dural	90	4	35-80	W 90-P Dural
		Dural	100	4		
40 to 60	W 90-A	Dural	73	4	35-80	W 90-A Dural
35 to 80	W 120-P	Dural	120	10	Screws and pins	W 120-P Dural
50 to 70	W 120-P	Dural	120	10	35-80	W 120-P Dural
35 to 80	W 140-P	Dural	140	5	35-80	-
80 to 100	W 140-P	Dural	140	5	Screws and pins	-

* Gluing possibilities (please contact us).

Please note for the references : P (flat) and A (angle)

COMPRESSION SEALS FOR PLUGGING



USE

Covering and sealing of joints between exterior or interior building elements (concrete, steel, aluminium).

Replacement of old sealants for traditional or prefabricated construction.

DESCRIPTION

Synthetic rubber extruded sections in compliance with NFP 85 301 standard*.

Colours: black, grey and sand-coloured.

OPERATING CHARACTERISTICS

SECTION REFERENCE			JOINT PLAY MINI-MAXI	JOINT MINIMUM DEPTH AT FITTING
Black	Grey	Sand-coloured	In mm	In mm
JD 16	JD 16	JD 16	8-12	25
JD 18	JD 18	JD 18	12-15	25
JD 25	JD 25	JD 25	15-20	30
JD 34	JD 34	JD 34	21-28	40
JD 42	JD 42	JD 42	26-34	45
JD 63			35-55	70
JD 83			60-72	90

* Note : possibility of concrete adherence with the use of "JB glue".

Consumption from 10 to 30 g per metre according to type of section.

JOINT COVERS

USE

The "W" joint cover system is intended for interior or exterior wall and ceiling joints in continuity with those of the floor (see table opposite).

DESCRIPTION

PVC or aluminium extruded section with a dovetail enabling fastening by clips or by screws and pins for certain models.

PHYSICAL AND CHEMICAL PROPERTIES

EXTRUDED SECTION : Flat or 90° angle type of 30, 50, 70, 90, 120, 140 mm.

- **PVC :** Compounds used comply with standard NFT 54.405. Vinylic based extruded section for outside use.



Flame resistant – M2 classification.

Colours: White – Grey – Sand-coloured – Brown

- **DURAL :** 6060 T5 alloy

Available finishing :

- class 15 colourless anodising
- RAL thermo lacquering colours
- wood pattern designs : maple, beech, cherry, oak, wenghe... Other finishes upon request.

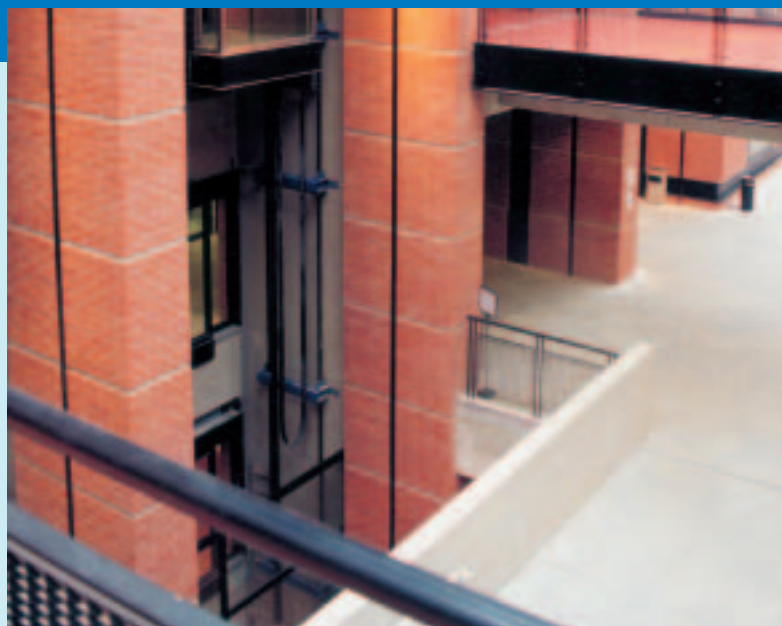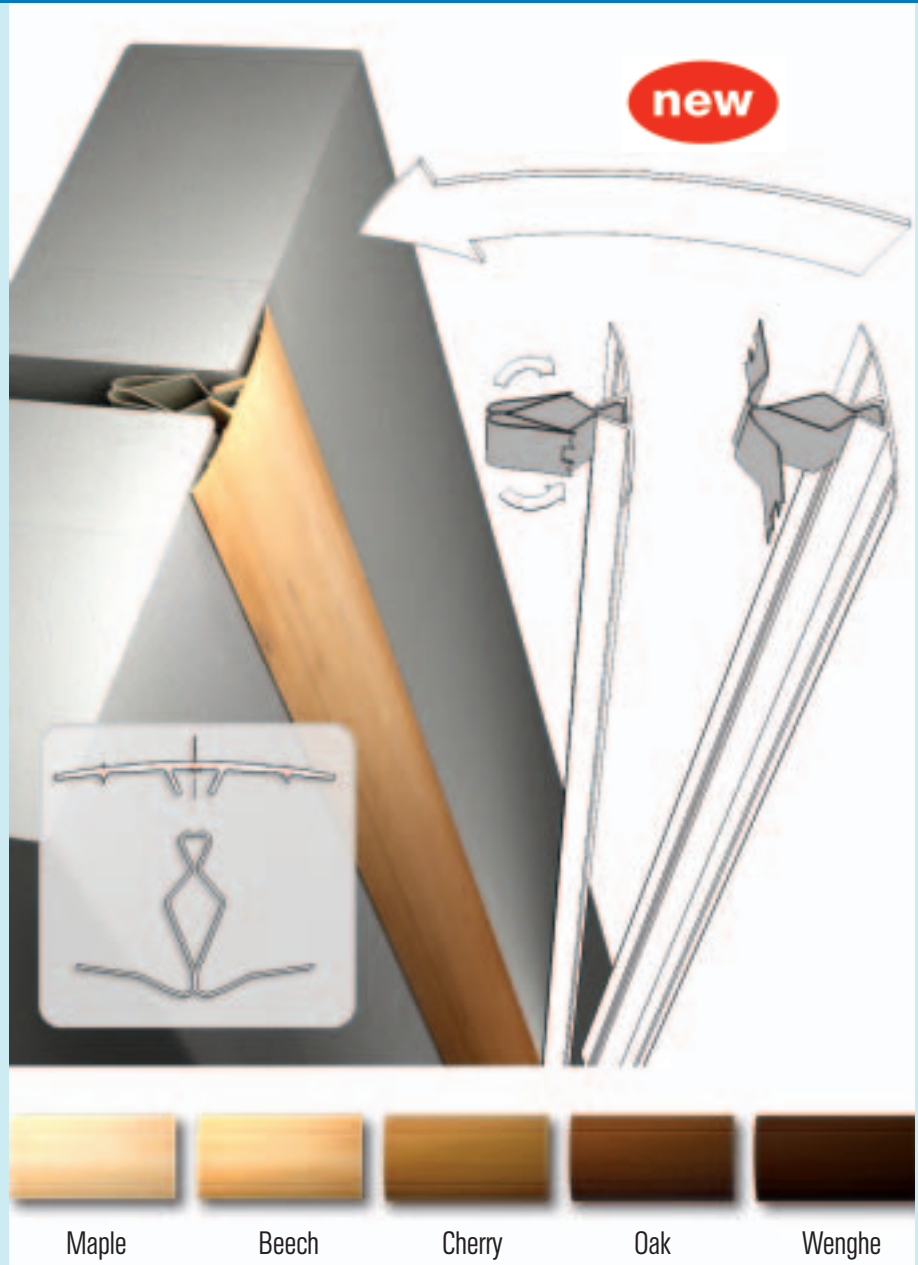

TYPICAL SPECIFICATION EXAMPLE

The supply and installation of 96 meters of C/S FRANCE JD compression seal.

Specification complement :

The supply and installation of a "jointfeu" joint of diameter appropriate to that of the joint to be dealt with for a 2h fire resistance.

Elements manufactured and supplied by
C/S FRANCE

135, rue Edouard Isambard - B.P. 66

27120 PACY SUR EURE CEDEX - FRANCE

Phone : 00 33 (0)2 32 67 00 00 - Fax : 00 33 (0)2 32 67 14 12

Website : www.cs-france.fr

E-mail : marketing-export@cs-france.fr


ALL METAL WALL AND CEILING COVERS

Flush or surface finish.

Mechanically assembled elements.

Invisible fixings

Fire resistant barrier optional.

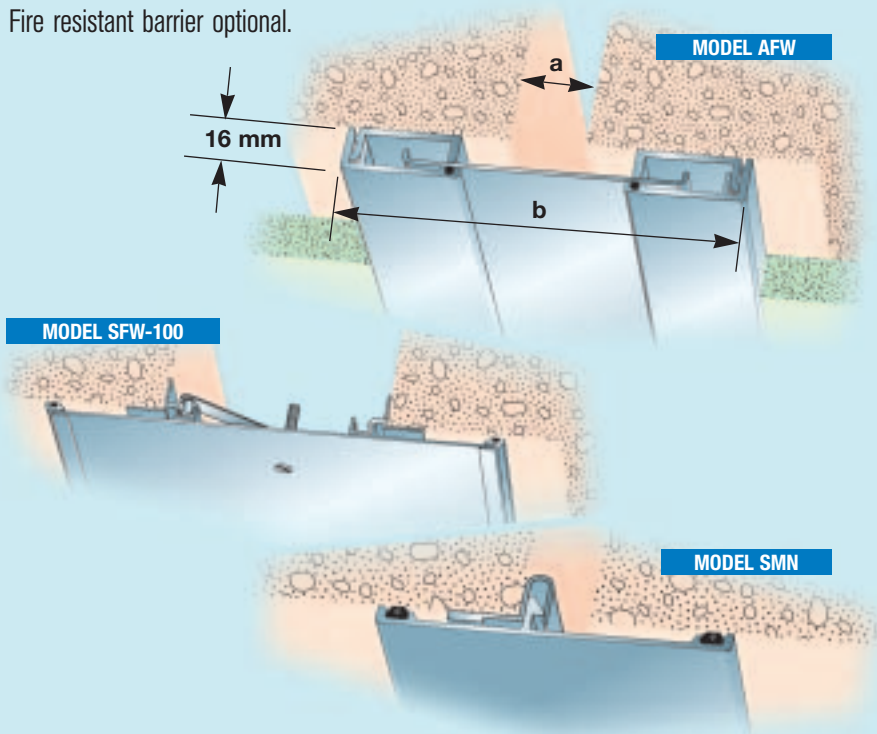

FOR JOINTS from 20 to 250 mm on wall and ceiling

Type	a mm	b mm	Movement ± mm
AFW-25	25	127	12
AFWC-25*	25	50	12
SMN-25	25	127	12
SMCN-25*	25	75	12
AFW-50	50	197	25
AFWC-50*	50	108	12
SMN-50	50	197	25
SMCN-50*	50	124	25
AFW-100	100	298	75
AFWC-100*	100	184	38
SMN-100	100	298	90
SMCN-100*	100	200	88
SFW-100	100	190	50
SCW-100*	100	146	31
SFW-150	150	300	76
SCW-150*	150	230	38
SFW-200	200	380	101
SCW-200*	200	292	50
SFW-250	250	455	127
SCW-250*	250	355	63

*References for vertical corner joints.

THINLINE SURFACE/FLUSH WALL AND

Flush or surface finish. Multidirectional elasticity.


Elastomer flexible strips resistant to oil, tar, and certain acids.

2 standard colours of gaskets.

Easy to maintain smooth exposed surfaces.

Fire resistant barrier, optional.

No emission of chloride smoke in the event of fire.

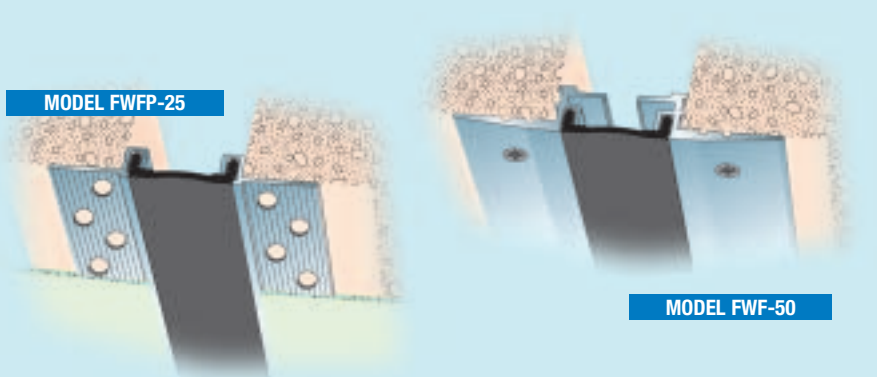

FOR JOINTS from 20 to 50 mm on wall and ceiling

Type	a mm	b mm	Movement ± mm	Example of floor continuity
FWF-20	20	22	4	GFPS 20
FWFC-20*	20	22	4	GFPSW 20
FWF-25	25	27	6	GFPS 25
FWFC-25*	25	27	6	GFPSW 25
FGFS-25	25	110	6	GFS 25
FGFSC-25*	25	67	6	GFPSW 25
FWF-50	50	52	12	GFT 50
FWFC-50*	50	52	12	GFTW 50
FGFS-50	50	130	12	GFPS 50
FGFSC-50*	50	90	12	GFSW 50

*References for vertical corner joints.

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Grey and black, standard colours.

For other colours, please contact us.

CHARACTERISTICS

THE ALL METAL joint cover system is intended for interior wall and ceiling joints, in continuity with those of the floor (see table opposite).

THE "SMN" models consist of a plate snapped on to a continuous aluminium frame (section delivered with fixings).

The "AFW" model consists of a central plate held by two covering sections which are themselves snapped on aluminium frames spaced out every 600 mm (section delivered with fixings).



CEILING COVERS

CHARACTERISTICS

The "THINLINE FLUSH" system is intended for exterior joints on wall and ceiling in continuity with those of the floor (see table opposite).

MODEL WITHOUT RECESS

FWF : for walls or ceilings in plaster or concrete. Attach the aluminium frames and fill the recesses with a finishing compound.

FGFS : Surface mounted on wall or finished ceiling. Attach the expansion cover joint to the final covering.



SEISMIC EXTERIOR WALL COVERS

Multidirectional elasticity.

Elastomer flexible strips resistant to oil, tar, and certain acids.

Anti-condensation membrane, optional.


No emission of chloride smoke in the event of fire.

Heat welded weather tight transitions.

CHARACTERISTICS

These joint covers are applied to the facades of very high buildings. They have been designed to compensate for oscillatory and rotational phenomena in addition to normal building expansion.


MODEL SC-100/125

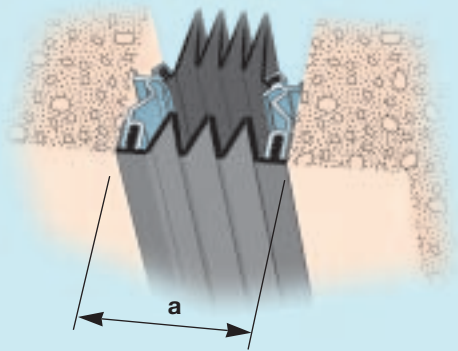

EXPANSION JOINT from 50 to 400 mm on the exterior façade

Type	Joint width mm (a)	Movement ± mm
SC-50	50	25
SC-75	75	38
SC-100/125	100/125	63/88
SC-150/175	150/175	114/139
SC-200/225	200/225	165/190
SC-250/275	250/275	215/241

MODEL SC-200/225

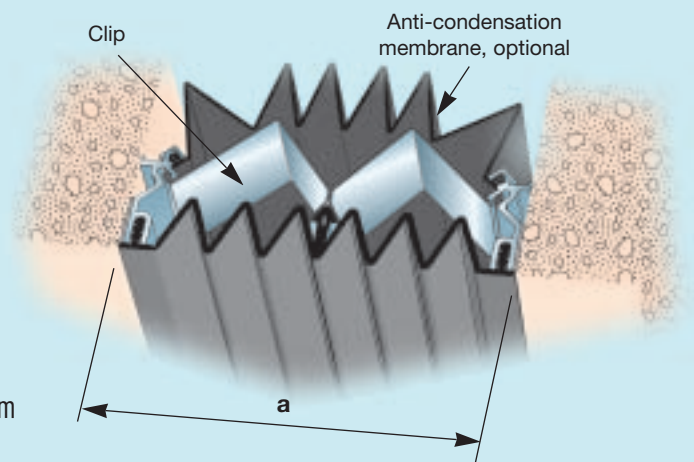

DESCRIPTION

They consist of an elastomer section which snaps onto lateral aluminium frames.

For very wide joints, the rigidity of the whole is ensured by clips positioned every 600 mm behind the elastomer joint.

This system avoids anarchic deformations of the joint cover even in the case of movement of considerable magnitude.



FINISH

COLOURS AVAILABLE FOR FLEXIBLE STRIPS :

Black, for other colours, please contact us.

The sections in primary aluminium are supplied with fastenings and pins for concrete support.


The clips are made of stainless steel.

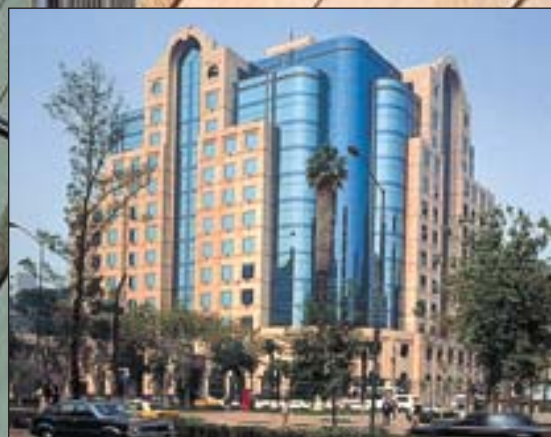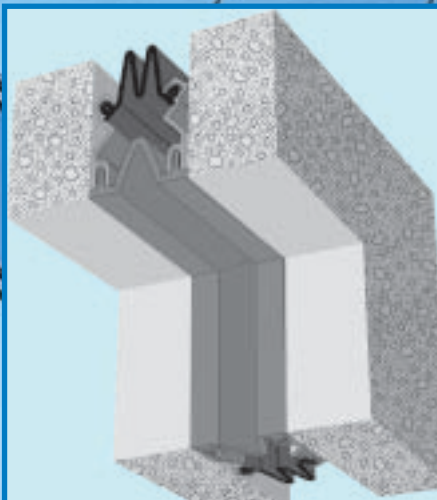



TYPICAL SPECIFICATION EXAMPLE

The supply and installation of 120 meters of C/S FRANCE SC-200 joint cover.
 Elements manufactured and supplied by
 C/S FRANCE
 135, rue Edouard Isambard - B.P. 66
 27120 PACY SUR EURE CEDEX - FRANCE
 Phone : 00 33 (0)2 32 67 00 00 - Fax : 00 33 (0)2 32 67 14 12
 Website : www.cs-france.fr
 E-mail : marketing-export@cs-france.fr

THE GEOGRAPHICAL PRESENCE...

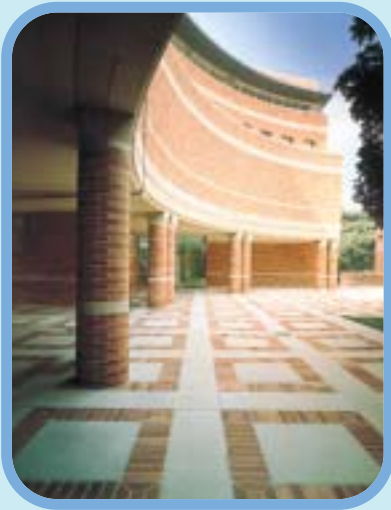

...OF A LEADING GROUP

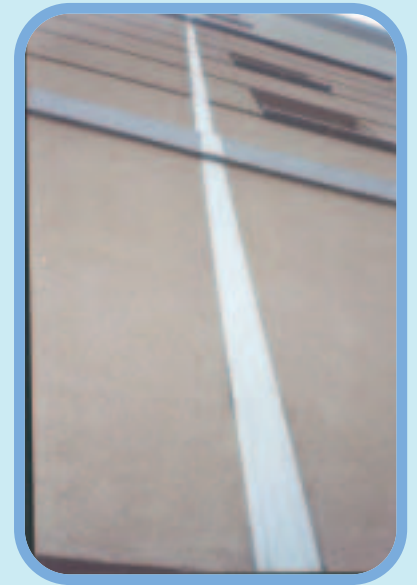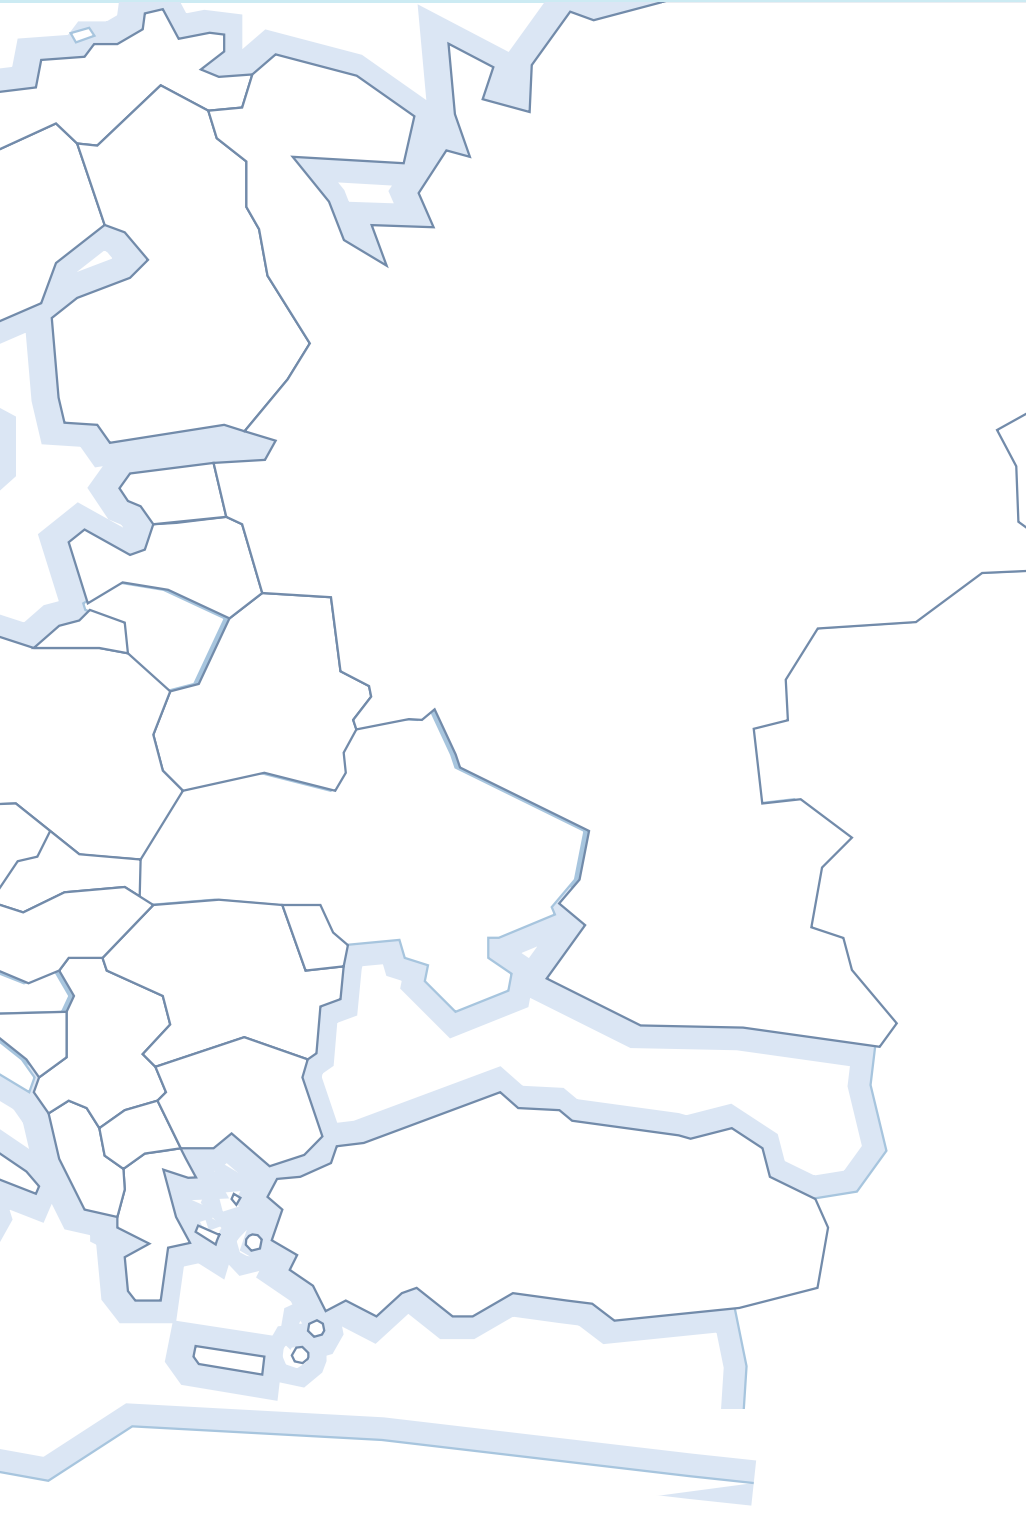



C/S France Sarl
135, rue Edouard Isambard - B.P. 66
27120 Pacy-sur-Eure Cedex
FRANCE

Tel. : 00 33 (0)2 32 67 00 00
Fax : 00 33 (0)2 32 67 14 12
Site internet : www.cs-france.fr
E-mail : marketing-export@cs-france.fr



Architectural Solutions



WORLDWIDE

COUVRANEUF



Expansion joint covers systems

C/S ACROVYN®




Wall, corner and door protection

C/S PEDISYSTEMS



Entrance flooring systems

WATTOHM



Technical profiles and plastic tubes

WATTOLENE



Extruded polystyrene sheets

LUMISYSTEMS



Lighting appliances

C/S AIRFOIL



Sun controls